

Smart Switch User Manual

WiFi or Zigbee Version



Description

Thank you for purchasing our smart switch products. Please read this manual carefully before use to ensure that you can use the product safely, and keep the manual properly for reference when necessary.

This smart Wall Switch suitable for all incandescent lamp, energy saving lamp, LED lamp, tungsten lamp, electronic ballast fluorescent lamp, etc.

Please feel free to contact us if you have any question, we will try our best to service you.

Specification

Max.Power at 110V

Capacitive load: 200w/gang

Resistive load: 400W/gang

Max Power at 220V

Capacitive load: 400w/gang

Resistive load: 800W/gang

Input Voltage: AC100V-250V/AC50-60Hz

Operating System: IOS9.0/Android4.4 or above

Wireless Type(optional): WiFi, or zigbee, or blue_tooth, or WiFi+ blue_tooth

Voice System Support: amazon alexa, Google Assistant

Wireless Control Distance: anywhere with 2G/3G/4G/5G network on your phone

Way to Control: Touch Control, App Remote Control, Voice Control, 433 RF Control(optional)

Wiring Schematic

A.Live Wire Connect to "L" terminal

B.Neutral Wire connect to "N" terminal


C.GND wire connect to "GND" terminal

D.Lamp connect to "L1, L2, L3,L4" terminal


(Neutral Wire of lamp connect to "N", Live Wire of lamp connect to "L1 or L2 or L3 or L4")

Wi-Fi/Zigbee L+N Wiring Diagram


AC100V-250V

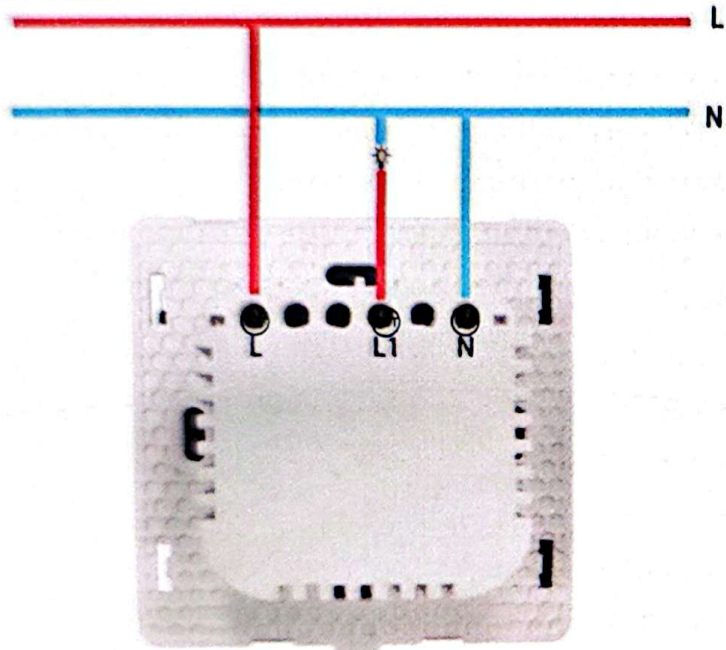


AC100V-250V

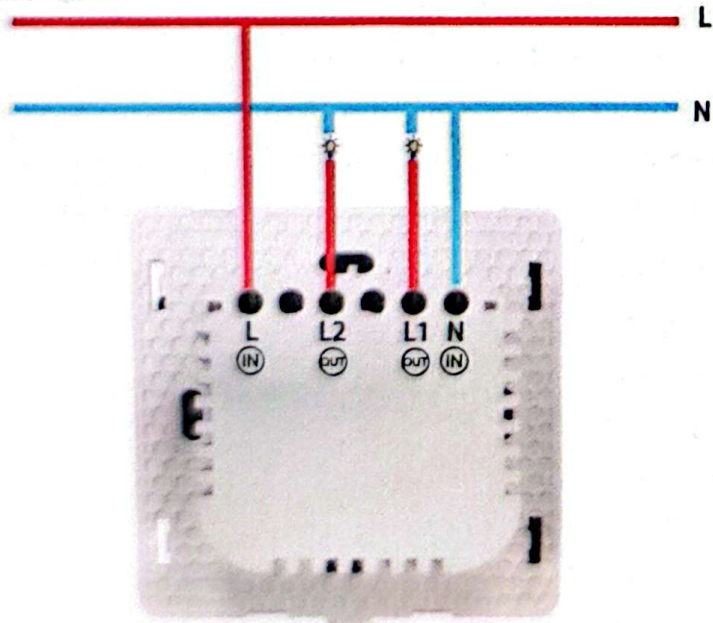




AC100V-250V

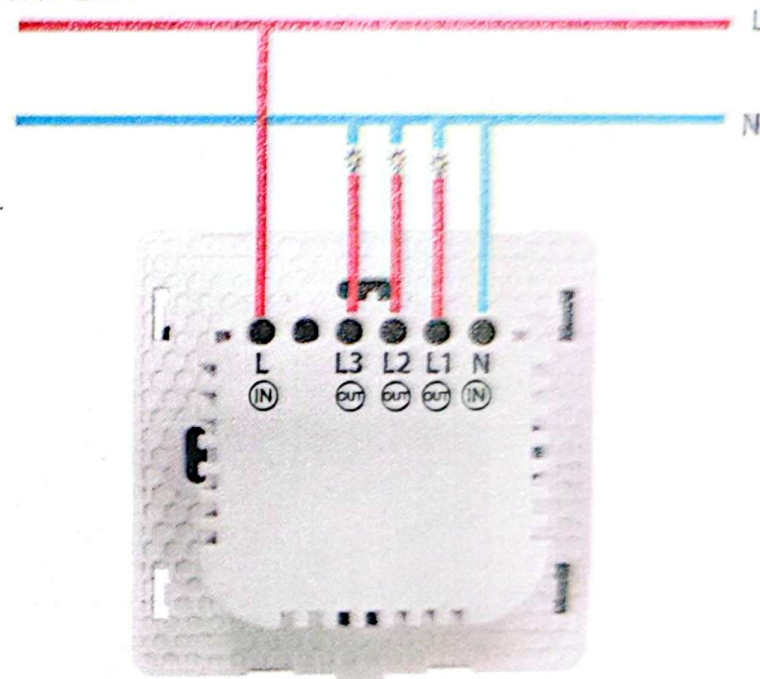

AC100V-250V

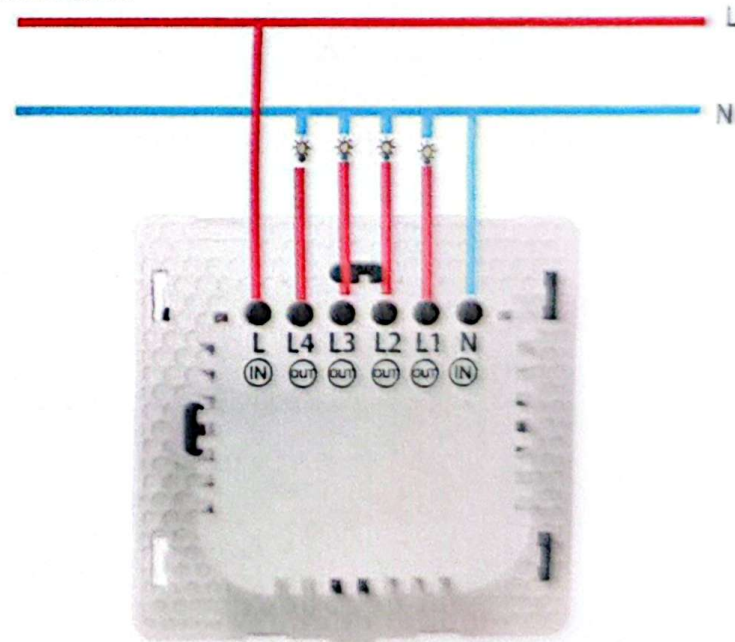


Zigbee without N Wiring Diagram

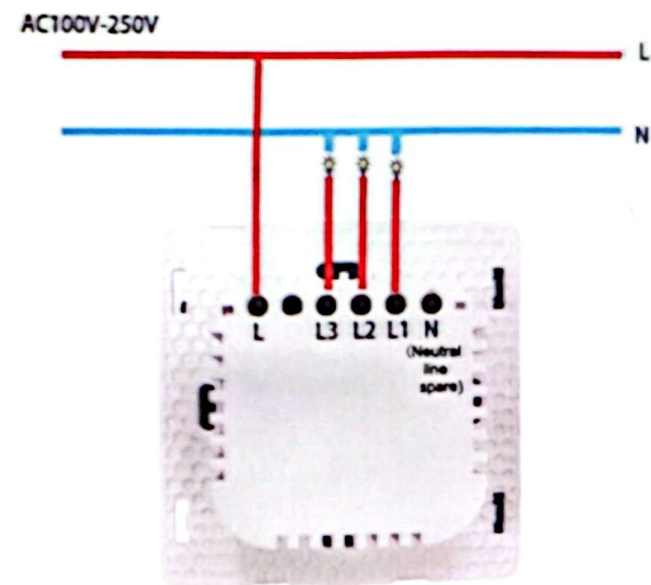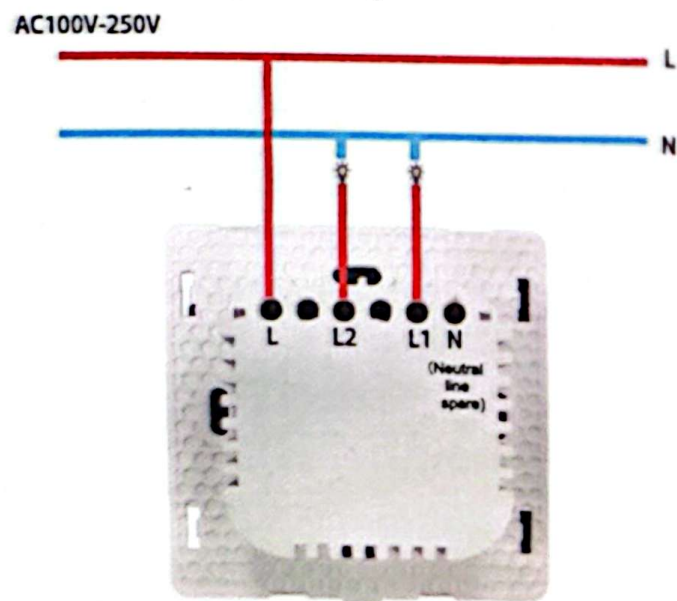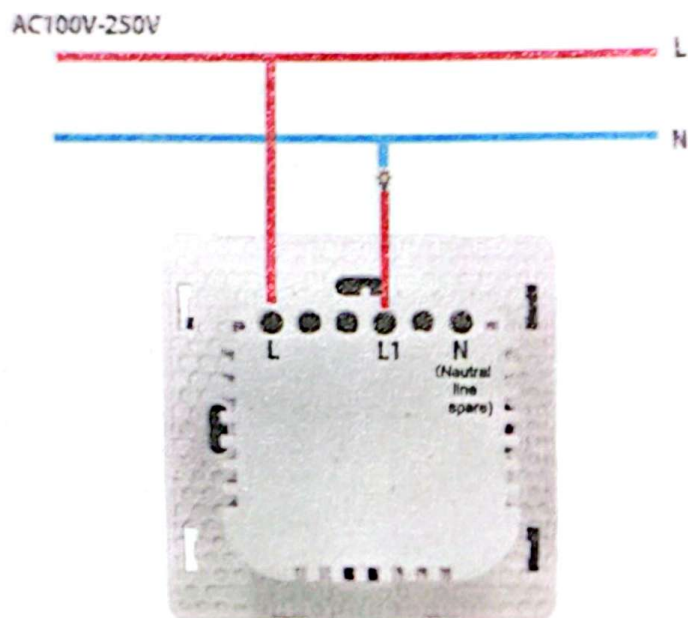

Installation

1. Use a small slotted screwdriver to open the face cover as shown in the picture
2. Fix the bottom cover to the wall box with screws. (wall box is NOT included)
3. Put the face shell to the bottom cover again.

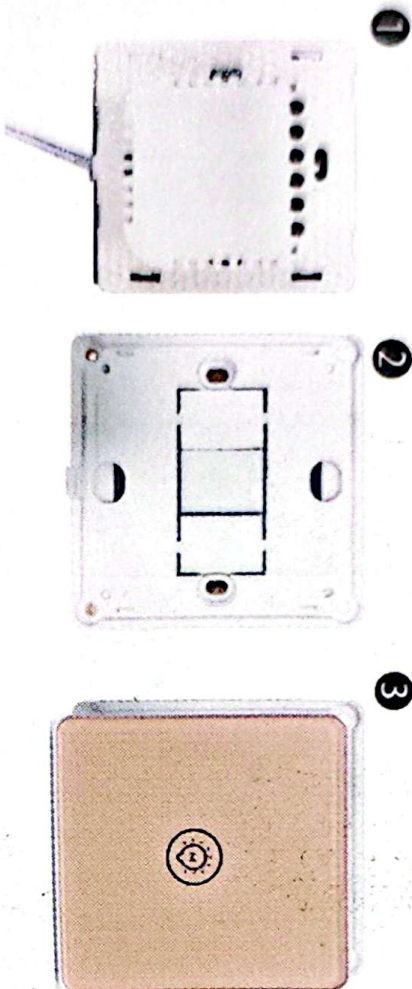

Note: Do not install with electricity

LED indicator on button

1. When power the switch, LED indicator will turn red.
2. LED indicator will flash when configure network.
3. Turn on the switch, LED indicator will turn white while off, it will change to red.

Pairing preparation

1. Turn the 2.4G Wi-Fi router on, please note that 5G Wi-Fi router is not available


2. Download the smart life app firstly in IOS APP store or Google Play, or scan the QR code as below shown.



IOS & Android System

Pairing operation of WiFi version

1. Long press any button on the switch panel till LED indicator flash quickly
2. Then add device like the follow pictures

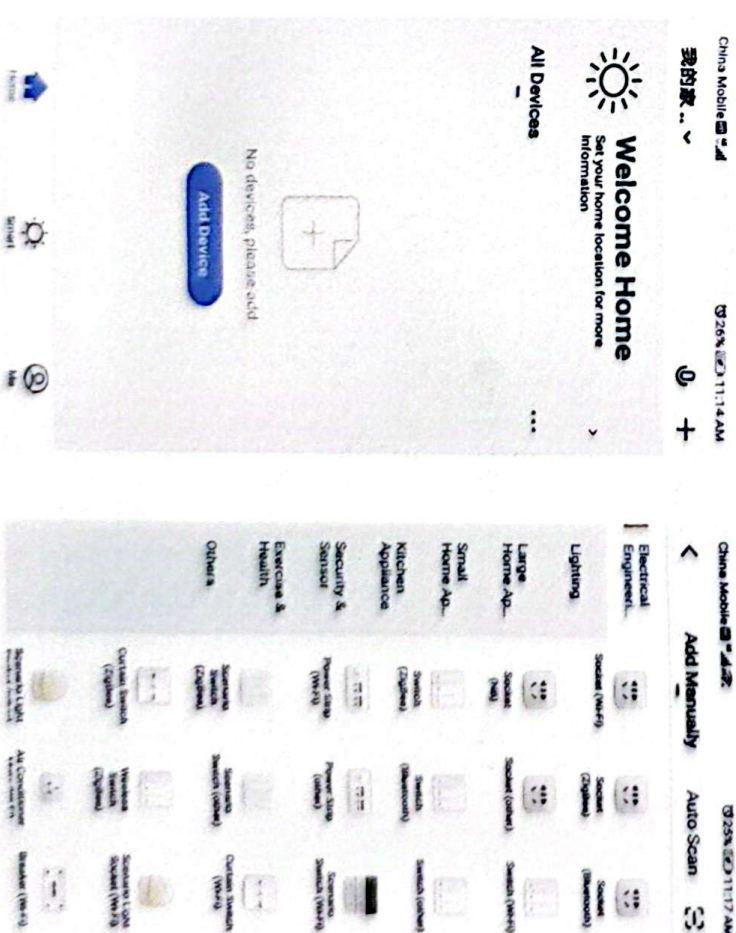


OS APP store or Google Play.



Android System

Version

1. Panel till LED indicator flash quickly

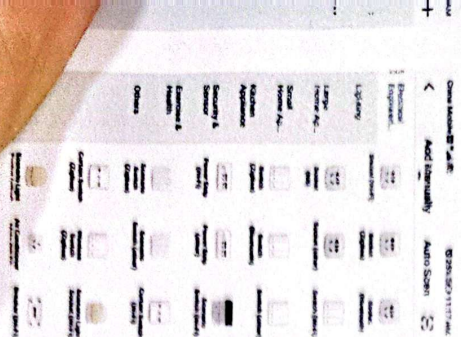

China Mobile 4G LTE 02:28:02 11:17 AM
Other Mode

Reset the device first.

Power on the device and confirm that indicator light rapidly blinks



Confirm indicator rapidly blink

China Mobile 4G LTE 02:28:02 11:19 AM
Cancel

Enter Wi-Fi Password

Only 2.4G Wi-Fi networks are supported >

2.4GHz ✓
5GHz ✗

MANMANG 8
@@@12345678

Confirm

China Mobile 4G LTE 02:28:02 11:18 AM
Cancel

Connecting...

Place your router, mobile phone, and device as close as possible



Device 1 found
Device 2 found
Device 3 found
Device 4 found
Device 5 found
Device 6 found
Device 7 found
Device 8 found
Device 9 found
Device 10 found
Device 11 found
Device 12 found
Device 13 found
Device 14 found
Device 15 found
Device 16 found
Device 17 found
Device 18 found
Device 19 found
Device 20 found
Device 21 found
Device 22 found
Device 23 found
Device 24 found
Device 25 found
Device 26 found
Device 27 found
Device 28 found
Device 29 found
Device 30 found
Device 31 found
Device 32 found
Device 33 found
Device 34 found
Device 35 found
Device 36 found
Device 37 found
Device 38 found
Device 39 found
Device 40 found
Device 41 found
Device 42 found
Device 43 found
Device 44 found
Device 45 found
Device 46 found
Device 47 found
Device 48 found
Device 49 found
Device 50 found
Device 51 found
Device 52 found
Device 53 found
Device 54 found
Device 55 found
Device 56 found
Device 57 found
Device 58 found
Device 59 found
Device 60 found
Device 61 found
Device 62 found
Device 63 found
Device 64 found
Device 65 found
Device 66 found
Device 67 found
Device 68 found
Device 69 found
Device 70 found
Device 71 found
Device 72 found
Device 73 found
Device 74 found
Device 75 found
Device 76 found
Device 77 found
Device 78 found
Device 79 found
Device 80 found
Device 81 found
Device 82 found
Device 83 found
Device 84 found
Device 85 found
Device 86 found
Device 87 found
Device 88 found
Device 89 found
Device 90 found
Device 91 found
Device 92 found
Device 93 found
Device 94 found
Device 95 found
Device 96 found
Device 97 found
Device 98 found
Device 99 found
Device 100 found

China Mobile 4G LTE 02:28:02 11:18 AM
Cancel

Device added successfully



Alexa and google Home tutorial





Alexa Tutorial



Google Home Tutorial

Pairing operation of zigbee version

1. If you use zigbee switch, you need to add gateway to the smart life app firstly.
2. Then Long press any button on the switch panel till LED indicator flash quickly.
3. Click "LED already blink" to add switch to app at last.

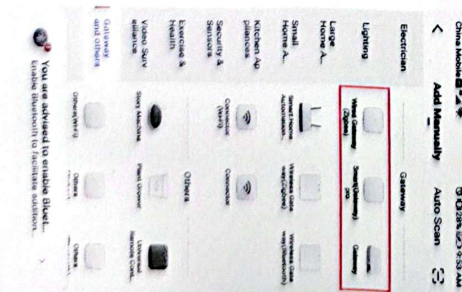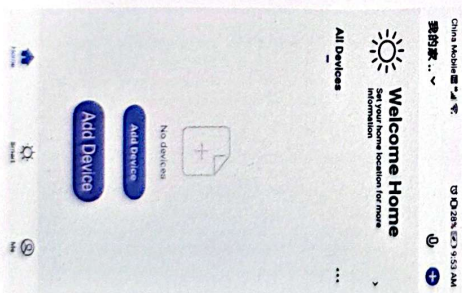

China Mobile 4G LTE 02:28:02 9:53 AM
Cancel

Reset the device first.

After powering on the gateway, connect it to the 2.4GHz family-band router. Confirm that the indicator for distribution turns green as usual. (Make mobile phones and gateways under the same network)








Confirm CONNECTING AND GREEN ON

China Mobile 4G LTE 02:28:02 9:58 AM
Cancel

Connecting...

Place your router, mobile phone, and device as close as possible



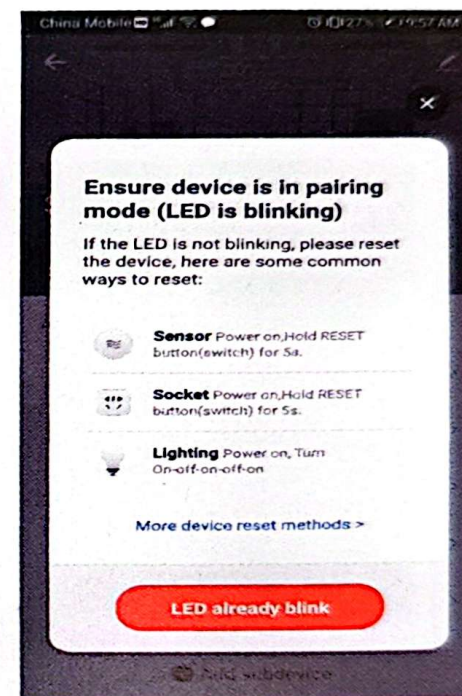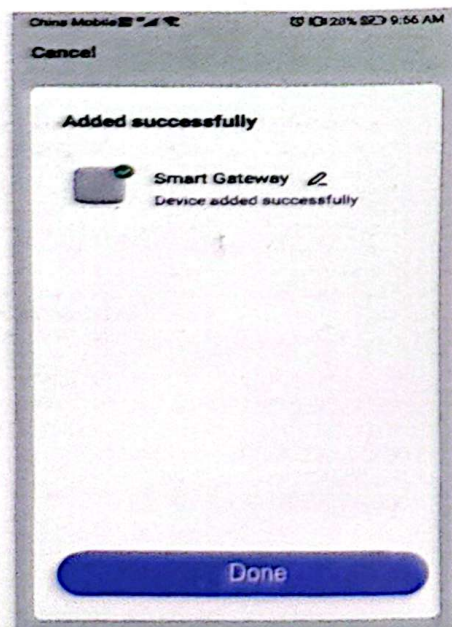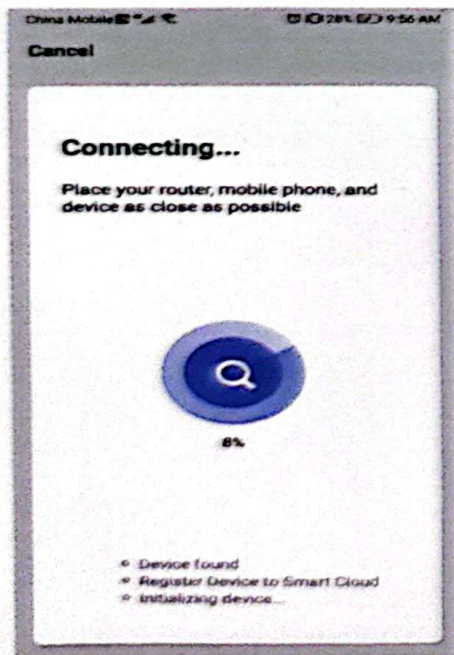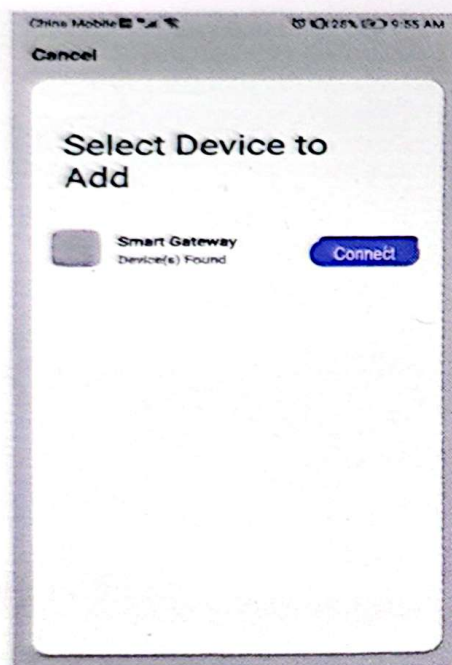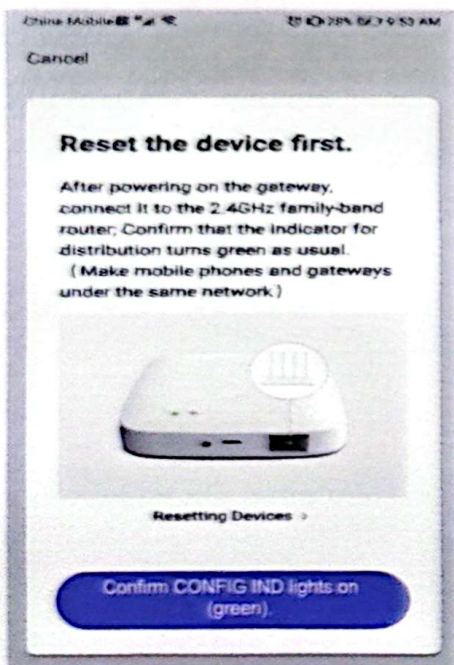

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

Made in China